



1 لا تحزنوا على ما فاتكم ولا على ما آتاكم

No:	Construction of Aa.Ukulhas Health Center		
Project:	TES/2023/W-018		
Issued Date	30 th April 2023		
No. of Pages: -03	BoQ: -00	Drawings: -00	

Please include this amendment when submitting the bid. بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ


- **Answers for the queries is attached with this Clarification.**

۵۱

Name: Fathimath Rishfa Ahmed

 $\frac{x}{1-x}$

Signature:

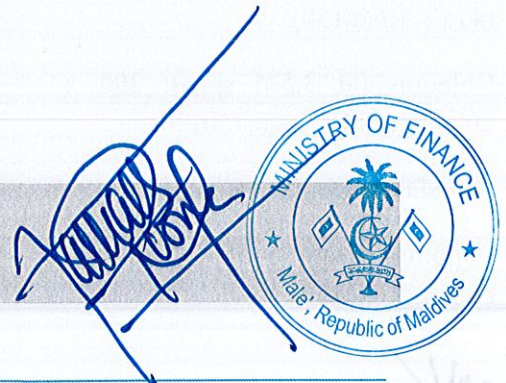



Ministry of Finance
Male', Republic of Maldives

Document Reference	Contractor Comments	Response/Reference Document
BOQ 2.5.01 - Water Proof Membrane - DPM	below ground slab concrete not considered, above sand blinding we have to provide the DPM sheet or we have to lay the ground slab concrete above the sand	to Include in Additions/Omissions Bill
BOQ 3.11.01 - Constrion of Space for installation of Oxygen bank with menifold, Vaccum plant amd medical air plantt, Size of the shed will be decised as per the plant manufactures requirements.	shed location not mentioned in the drawing, it's coming inside the boundary or we have to construct other location	to Include in Additions/Omissions Bill
BOQ 3.12.0 - 150mm thick Solid block single wall 2m Height of boundary wall surrounded by the land area with oil based paint system with textured finish Footing: 600 x 600mm (T10 @150 BW) Foundation Beam: 300 x 200mm (4T12, R6@150) Columns (at 3.5M span): 200 x 200mm (4T12, R6@150) Foundation Depth: 750mm Capping Beam: 150 x 150mm (4T10, R6@150)	Boundary wall BOQ description back side gate and front side gate not included, please let me gate will be add in our scope and please provide the front gate size and design detail drawing	to Include in Additions/Omissions Bill



[Handwritten signature]

BOQ 10.4.0 - Cladding	Kindly provide the elevation drawing for cladding work	Refer to BOQ
BOQ 13.1.00 - Terrace Floor	As per the drawing mentioned 5000Lit backup water tank and roof garden work, but BOQ not mentioned, please clarify, we have to add this work in additional item	to Include in Additions/Omissions Bill
BOQ 13.1.00 - Rain water down pipe	Rainwater down pipe system drawing not given for both building and not included in BOQ, please clarify, we have to add this work in additional item	to Include in Additions/Omissions Bill
BOQ 15.0.00 - Fire Pump	Fire pump and pipe line work not mentioned in BOQ, please clarify, we have to add this work in additional item	to Include in Additions/Omissions Bill
BOQ 16.2.00 - Solar Panels	Dwg. Mentioned 500lit solar heater, we have to add this work in additional item	to Include in Additions/Omissions Bill
	Service ducts - Electrical & Plumbing, IT and others service pipe line duct location not mentioned in drawing, Kindly Provide the route plan	If not in the drawing, contractor to design
	Pump rooms- MWSC meter & water pumps room not shown in drawing, kindly provide the location	If not in the drawing, contractor to design
	Any existing buildings need to demolishing in site location	None
	Construction block can make with Local Sand	Manufactured Sand
	Manufactured Sand can use for concreting work	Yes
	Inside the site shall we make the Temp. staff, Labour Accommodation, site office & site store	Yes



[Handwritten signature]

